

سوئیچ دیجیتال ۱۶*۸

Features

- * Background music + 16 zone paging + voice message alarm
- * Built-in 8 inputs 16 outputs audio matrix
- * Built-in weekly scheduled timer
- * Built-in 16 zone speaker selector for remote paging console
- * Built-in 6 channel power sequencer
- * Built-in MP3 player of 2GB memory card through SD card slot
- * Built-in monitor
- * With telephone paging, fire alarm and remote paging console interface
- * With regular program and spared program
- * With Mic emergency announcement and CD/MP3 manual priority broadcast With memory function after power off
- * Each day program operation up to 200 steps

Matrix Background Music System

- * 4 extra program sources plus built-in MP3 matrix distributed into 16 zones 8 inputs and 16 outputs
- * Manual CD/MP3 priority broadcast at particular circumstance
- * The music will not be interrupted when paging console is make zone paging CD , AM/FM tuner, MP3 player as program audio sources
- * Playing modes: random, single circle, repeat and all circle
- * Music system will be monitored by operator in control room

Remote Zone Paging System

- * T-6600 built-in 16 zone speaker selector
- * With T-218 to achieve individual, group, each ten, all zone paging
- * T-218 paging with priority over music except EMC (fire alarm input (and Mic 1) -T6600 front panel
- * T-218 remote paging distance within 1 kms through Cat 5 cable and Rg45 Communication port
- * T-6600 can work with several T-218 at the same time
- * There is no interference other zones music when zone paging is Made Manual Zone Select paging system on T-6600 front panel

Voice Message System

- * Work with T-6203 to achieve all zone voice alarm system
- * Fire alarm system with priority except Mic 1
- * Work with T-6223(A) to achieve all zone, group zone, neighboring Zone Multi Voice Alarm system

Expansion Functions

- * Each zone power output no limit even higher than 5000W
- * Telephone paging interface extra power sequencer , extra monitor panel could be added


Specifications

Model	T-6600
Input	8 channels, Audio IN:10Kohms,0.77 Unbalanced MIC 60Ω, 10mV unbalanced
Output	16 channels 1KΩ, 0~1.5V Unbalanced
Frequency Response	30Hz~18KHz
THD	Less than 0.1%
Communication Port	4800 bps RJ45 connector 422/RS485 protocol
MP3 Frequency Response	20Hz~20KHz/1dB
MP3 S/N Ratio	95dB
MP3 Storage	External
Monitor	Built-in loud Speaker, 0.5W
Cycle Time	24 hrs
Alarm Signal	Input: 0V Short Circuit Industrial Standard
Timer Power Output	6 Channels 110~120VAC or 230~240 VAC 50/60Hz
Controls	Power Switch, 8 A IN MIC an volume control Program edit, 16 Audio channels CD MP3, NORMAL, and 3 SWIFT push Bottom
Indicators	LCD,
Power Supply	~110V/60Hz or ~230 V/50 Hz
Power Consumption	30W
Weight	7.5Kg
Dimensions (WxDxH)	484x304x132mm
Finish	Panel: aluminum plate, Case: steel plate



Weekly Timer with 8x16 Audio Matrix and Mp3 T-6600

Rear Panel T-6600

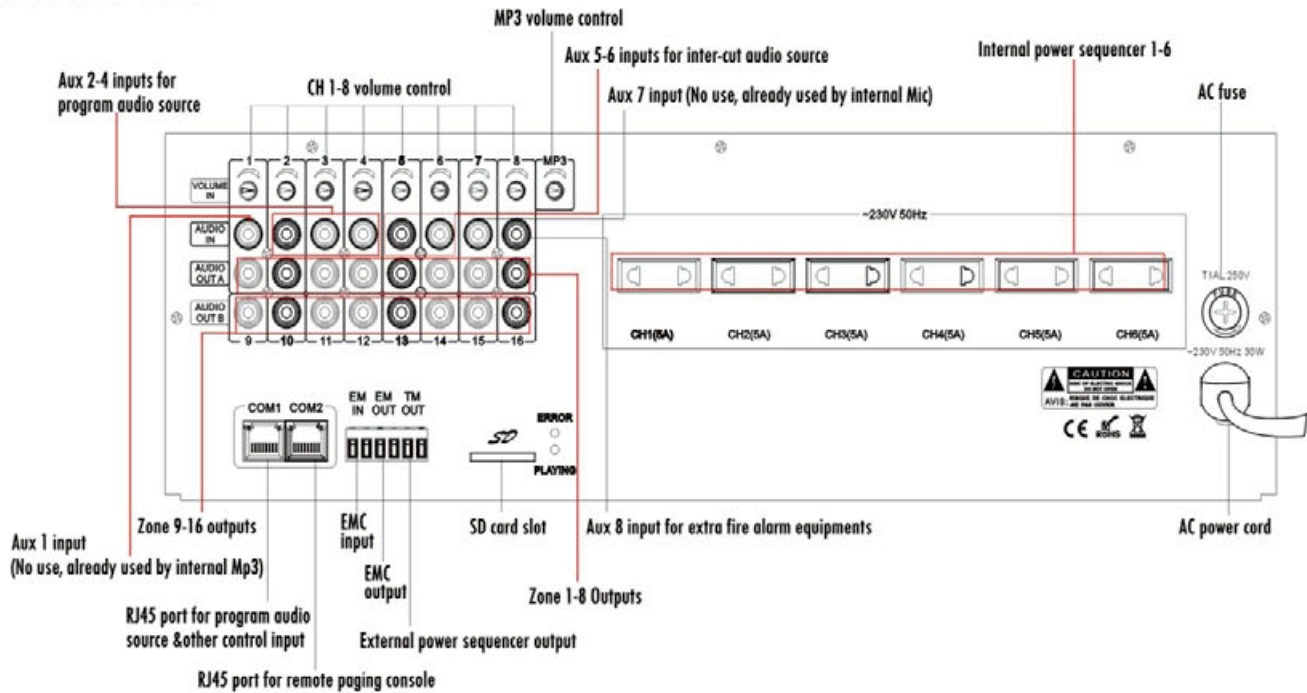

Connections

