




10 Zone Paging Controller with Speaker Selector T-6212(A)

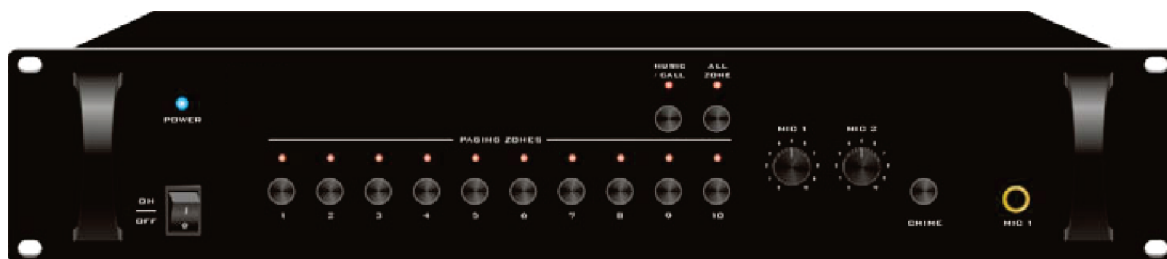

Features

- * Built-in 10 zone selector and paging selector, which can be expanded to 300 zones
- * Work together with remote paging console for paging and control over 10 zones.
- * Individual zone, group zones, 10 zones and all zones paging through remote paging console.
- * With memory function when power off can realize the restoration after electricity be turn on
- * 2 channels 10 zones amplifier inputs)A channel for BGM amplifier and B channel for EMC/paging amplifier(, in this way, the other zone's music system will not be interrupted when some zone is selected for paging.
- * 2 flexible amplifier connections: either 20 amplifiers wiring)10 BGM amps and 10 EMC/paging amps, there must be one of BGM amp and EMC/paging amp as one channel(and each of the 10 amps serves as one zone or 2 amplifiers wiring)1 BGM amp and 1 EMC/paging amp(and one amplifier divides into 10 zones.
- * Each zone power capacity is 500W and the total ten zones's capacity is 5000W
- * 10 zone speaker output terminals
- * All zone alarm in)A/B 2 channels(and all zone alarm output)A/B 2 channels(
- * Two-color zones status indicators accurately indicate music, paging or alarm status
- * Mic 1-2 inputs, line 1-2 inputs, audio output
- * 3 levels of input priority from high to low: EMC input, Mic1, remote paging console equivalent priority with built-in chim.
- * Built-in chime, chime volume and trigger are provided
- * Zone 1-10 selector, music/paging switch and all zone selector all are equipped with indicators.
- * Volume control over Mic 1-2 are provided
- * 2 RJ45 communication ports for paging console or cascade another paging controller
- * Dipswitch as ID address to be distinguished by controller or paging console

Optional


- *Panel with/without handhold

Specifications

Model	T-6212(A)
Input	MIC1,2:600 Ω ,5mV, unbalanced Line1,2:10K Ω ,775mV, unbalanced
Output	80dB
Frequency Response	MIC:100Hz~15KHz; Line: 30Hz~18KHz
S/N Ratio	MIC input: 60dB Line input: 80dB
Controls	MIC1, 2 VOL controls, 10 channel selectors, chime button, power switch
Indicators	Power LED , 10 paging channel LEDs
Power Supply	~110V/60Hz or~230V/50Hz or DC 24V
Power Consumption	40W
Weight	4.6Kg
Dimensions	484x303x88mm
Communication Protocol	RS422
Communication Input	RJ45
Communication Speed	4800bps
Finish	Panel: aluminum plate, black Case: steel plate, black

www.spinelectric.com

Rear Panel T-6212(A)

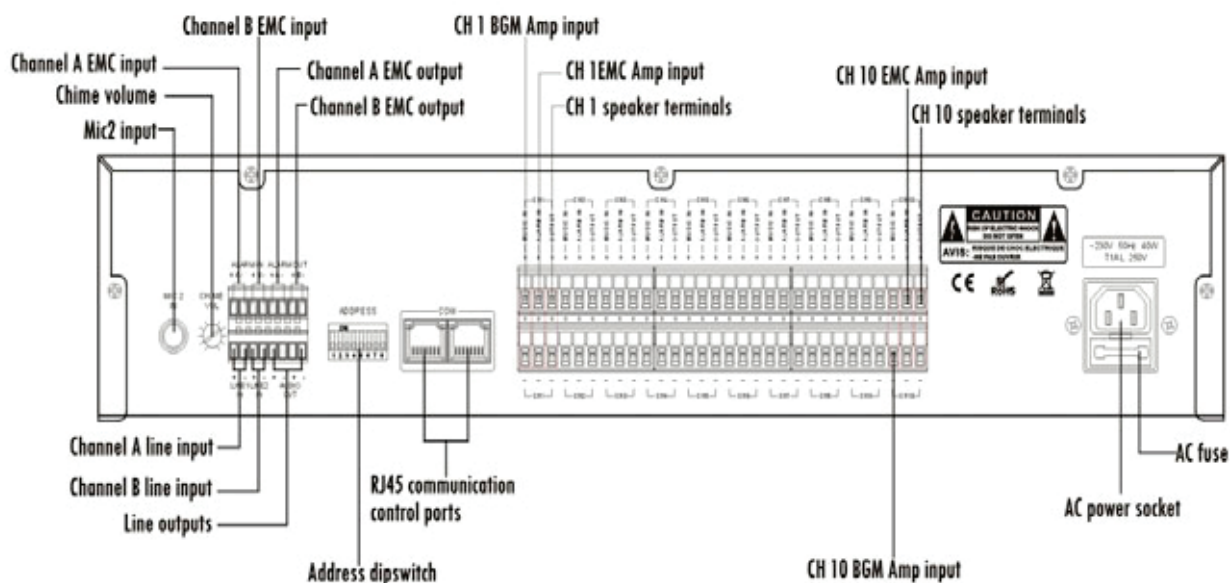

Connections

