



کنسول میکروفن دیجیتال

Descriptions

The T-218 is a high performance remote zone paging console that works with zone paging controller T-212 (A) for remote paging and control over a multi-zone system. Several paging modes (all zone group zones, 10 zones and individual zones) could be achieved through this paging console. Features include capability of 16 microphones and 300 paging zones work at the same time the T-218(A) will easily distinguish T-212(A) with its pre-set ID address. T-218(A) is paging system with priority over background music system.

Features


- * With operation number input keys and LED display
- * Capacity of manage 30 paging selectors T-212(A), up to 300 zones
- * Max remote control distance up to 1Km
- * With microphone volume control
- * RCA line input and output
- * Built-in chime and chime volume control
- * Max 16 microphone work together with RJ45 port in series connection

Specifications

Model	T-218 (A)
Input	MIC: 600Ω, 10mV, unbalanced Line: 10KΩ, 775mV, unbalanced
Output	Balanced
Frequency Response	MIC: 100Hz~15KHz; Line: 30Hz~18KHz
S/N Ratio	MIC input: 60dB Line input: 80dB
Controls	Chime MIC VOL controls, 300 channel selectors chime button, power switch
Indicators	Power LED, 10 paging channel LEDs
Power Supply	DC 24V
Power Consumption	10W
Weight	1.25Kg
Dimensions	220x142.7x51.5mm
Communication Protocol	RS422
Communication Input	RJ45
Communication Speed	4800bps
Finish	Panel: steel plate, black Case: steel plate, black Side board: plastic, black



Rear Panel T-218(A)

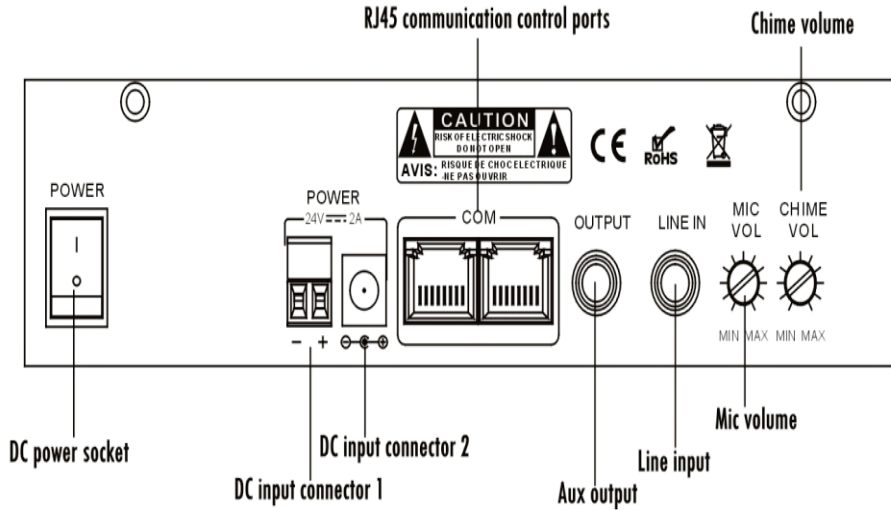

Connections

